

# PRODUCT DATA SHEET

TOUCHÉ CONTROLS



## MULTI-CHANNEL—DIMMING PACK



### DESCRIPTION

The Multi-Channel Dimmer Pack provides a convenient and cost-effective solution for line voltage dimming needs when paired up with Touché’s Room Managers and Local Relay Modules. These devices convert the 0-10V dimming signal from the Room Manager or Local Relay Module to a phase-cut dimmed output.

### FEATURES

- Dimmer Packs convert individual 0-10V dimming control signals to line voltage, phase-cut dimming.
- “Dimmed to Off” allows dimmer pack to completely control the load. Line voltage is not required to pass through the relay on the Room Manager or Local Relay Module—simplifying installation.
- Each channel is capable of controlling up to 16 amps of load. *Channels must be sourced from the same phase voltage.*
- Front panel indicators show line source status and dimming status.

Touché Controls (a Product of ESI Ventures)

A: 2085 Humphrey Street, Fort Wayne, IN 46803

T: 888-841-4356

W: [www.ToucheControls.com](http://www.ToucheControls.com)


## SPECIFICATIONS

VOLTAGE	120VAC
CONNECTIVITY	2 CONDUCTOR / 18 GAUGE FOR 0-10V SIGNAL
LISTINGS	UL508, cUL508
AMBIENT TEMPERATURE	40C (104F)
MAXIMUM HUMIDITY	10 - 90%, NON-CONDENSING

## CATALOGUE NUMBER

DEVICE TYPE	CHANNEL CONFIG	CONTROL	VOLTAGE
DP Dimming Pack	2x16 2 Channels - 16A	0/10 0-10 VDC	120 120 VAC

## CONNECTIVITY

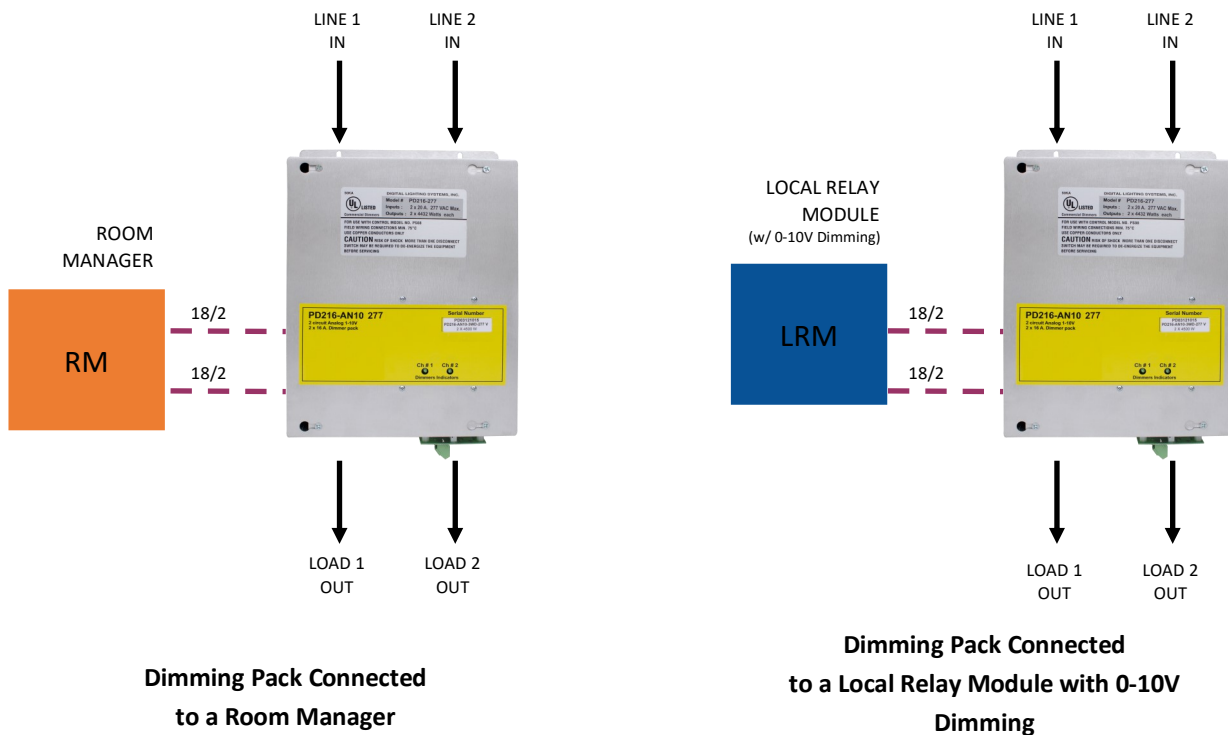

Touché Controls (a Product of ESI Ventures)

A: 2085 Humphrey Street, Fort Wayne, IN 46803

T: 888-841-4356

W: [www.ToucheControls.com](http://www.ToucheControls.com)