

TOUCHÉ LIGHTING CONTROL


# ONE SOLUTION™



## SPECIFIED DESIGN TRAINING

### EXAMPLE #6

- Three zones of control per training room
- Occupancy mode (auto-on / auto-off)
- AV integration

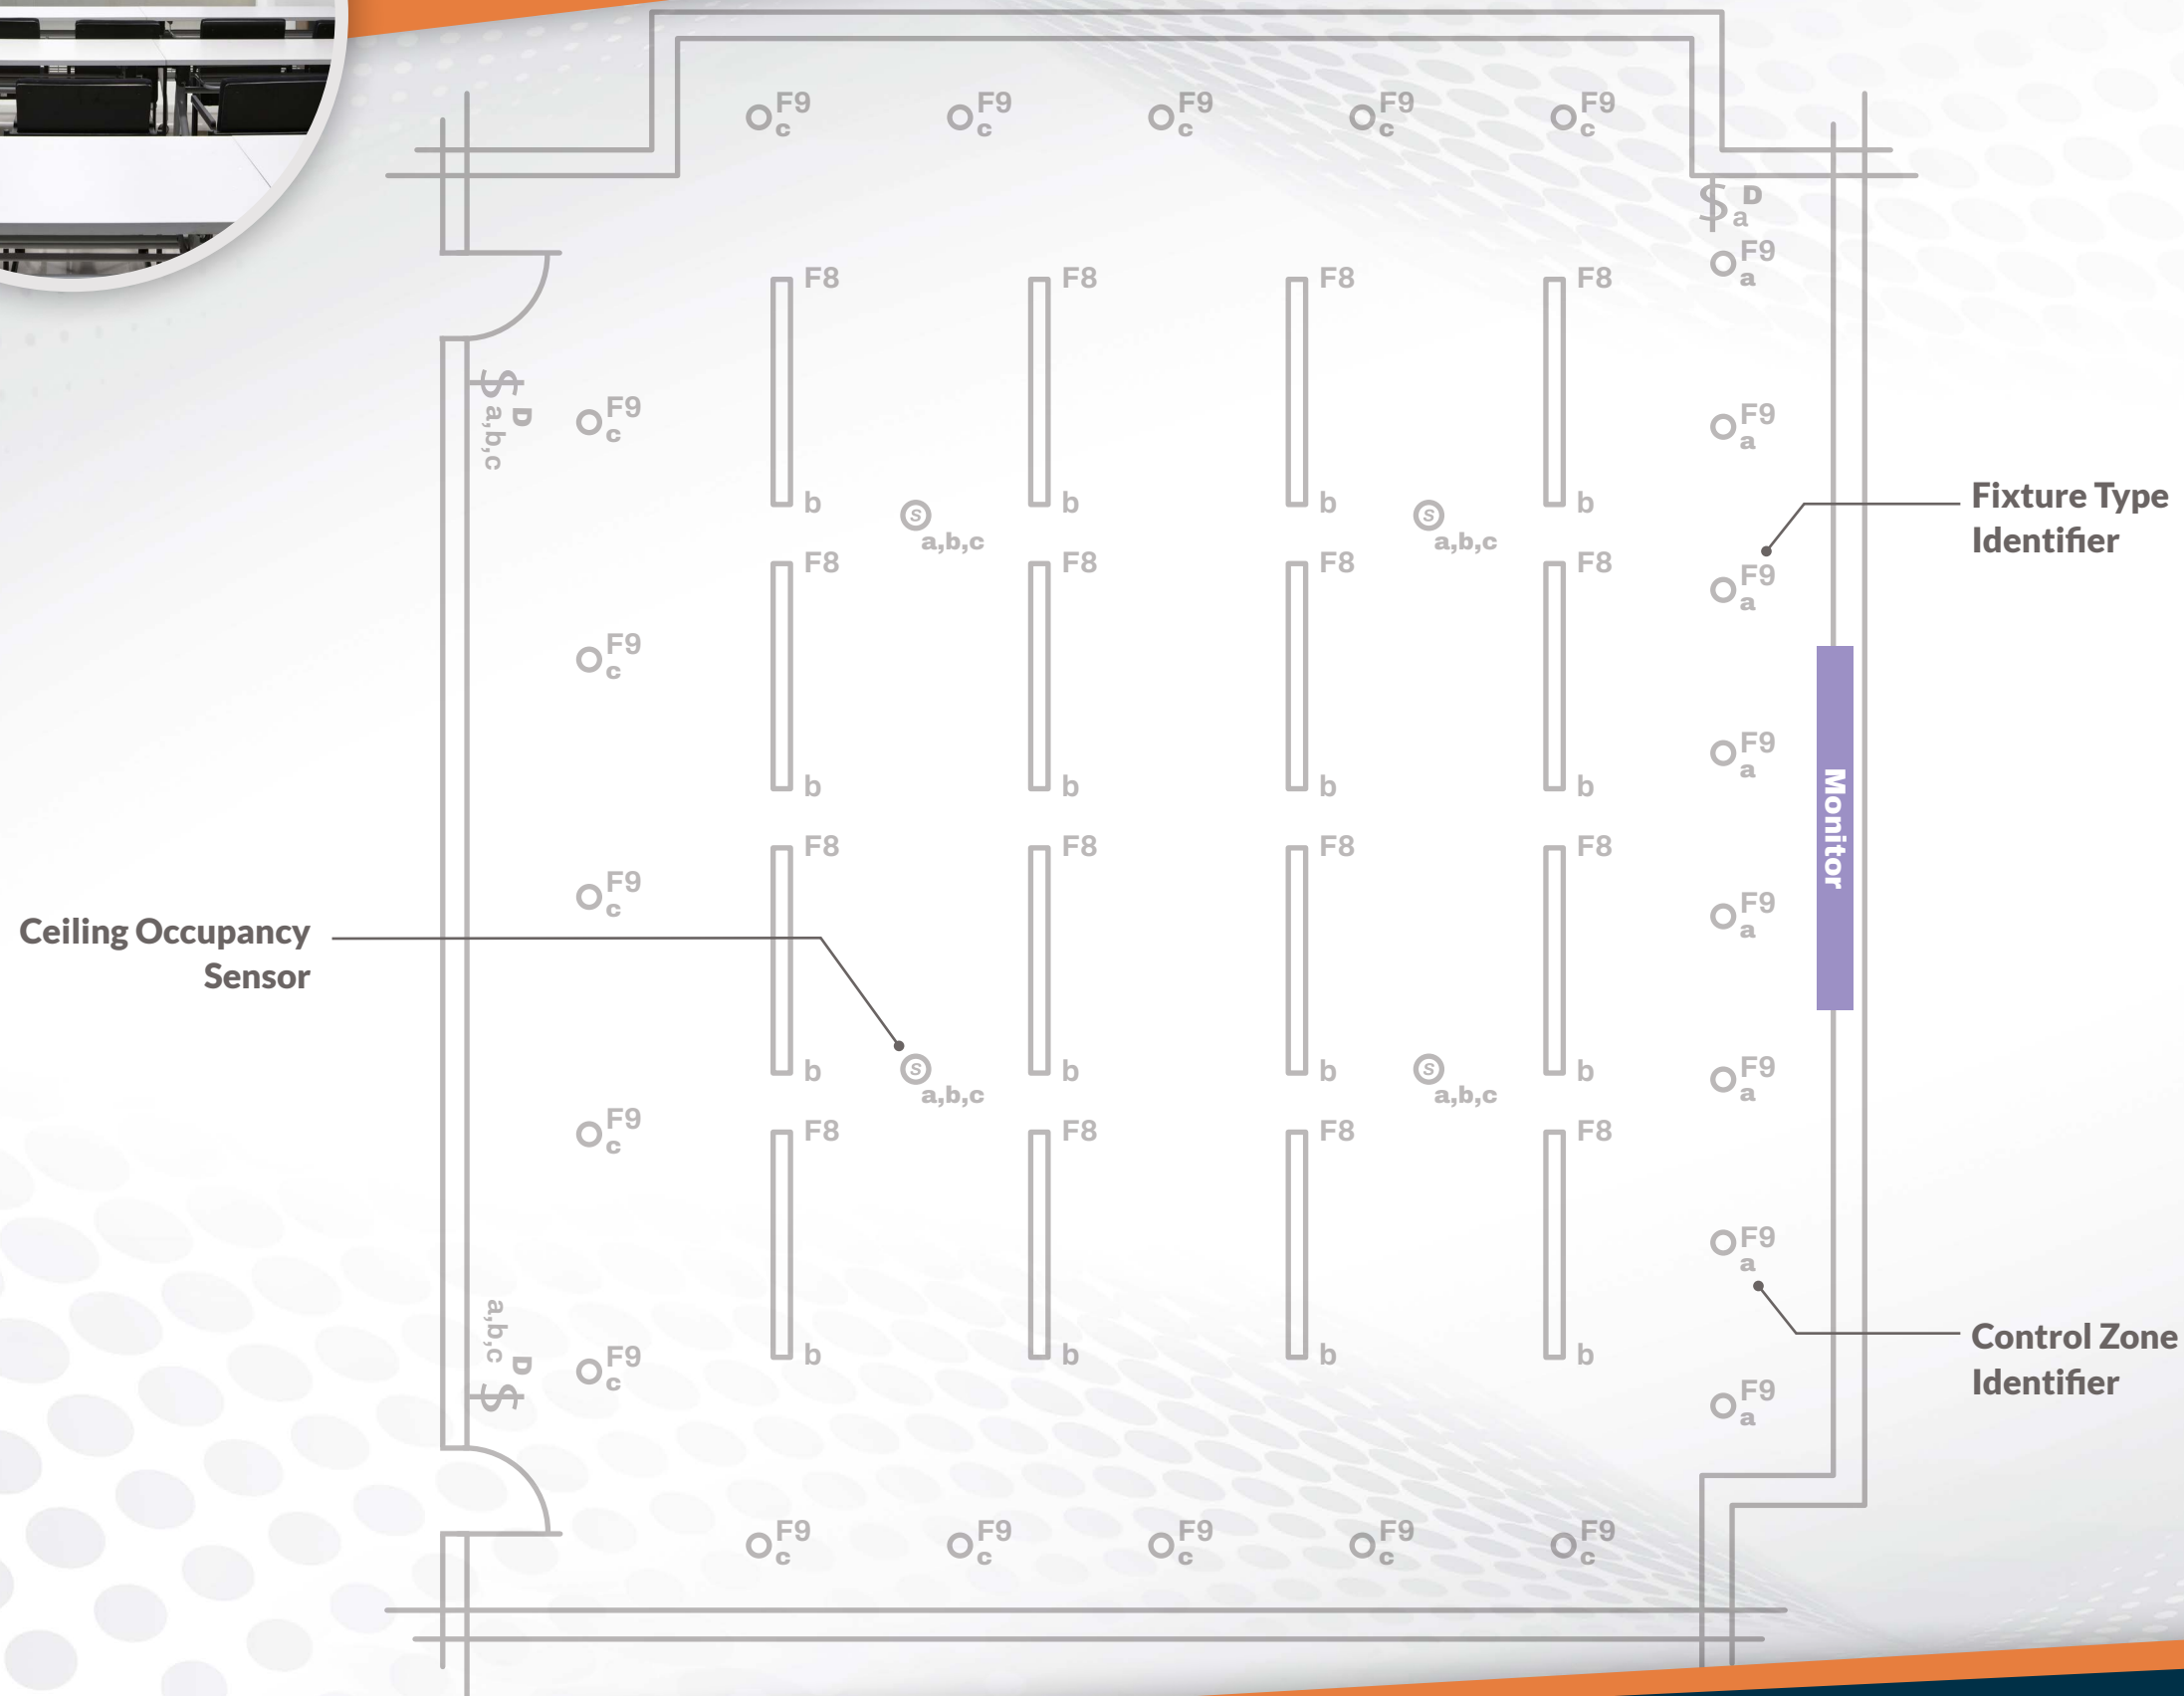

# ONE SOLUTION™



RS-232 Interface is configurable to meet common RS-232 communication settings.

Touché provides versatile and simple AV integration by being able to send and receive any printable ASCII strings.

## Touché Components

**RM** Room Manager  
Networked Room Controller

**F** Wall Station  
Color

**M** Wall Station  
Color Mini


**Smart Switch**  
Decorator

**SLC D** Smart Load Control  
Dimmable

**RS-232** RS-232  
Recommended Standard 232

**S** Smart Sensor  
Dual technology (PIR/passive acoustic) occupancy / vacancy sensor with built-in photo sensor.

**Cable Type**  
---- CAT5 (minimum)

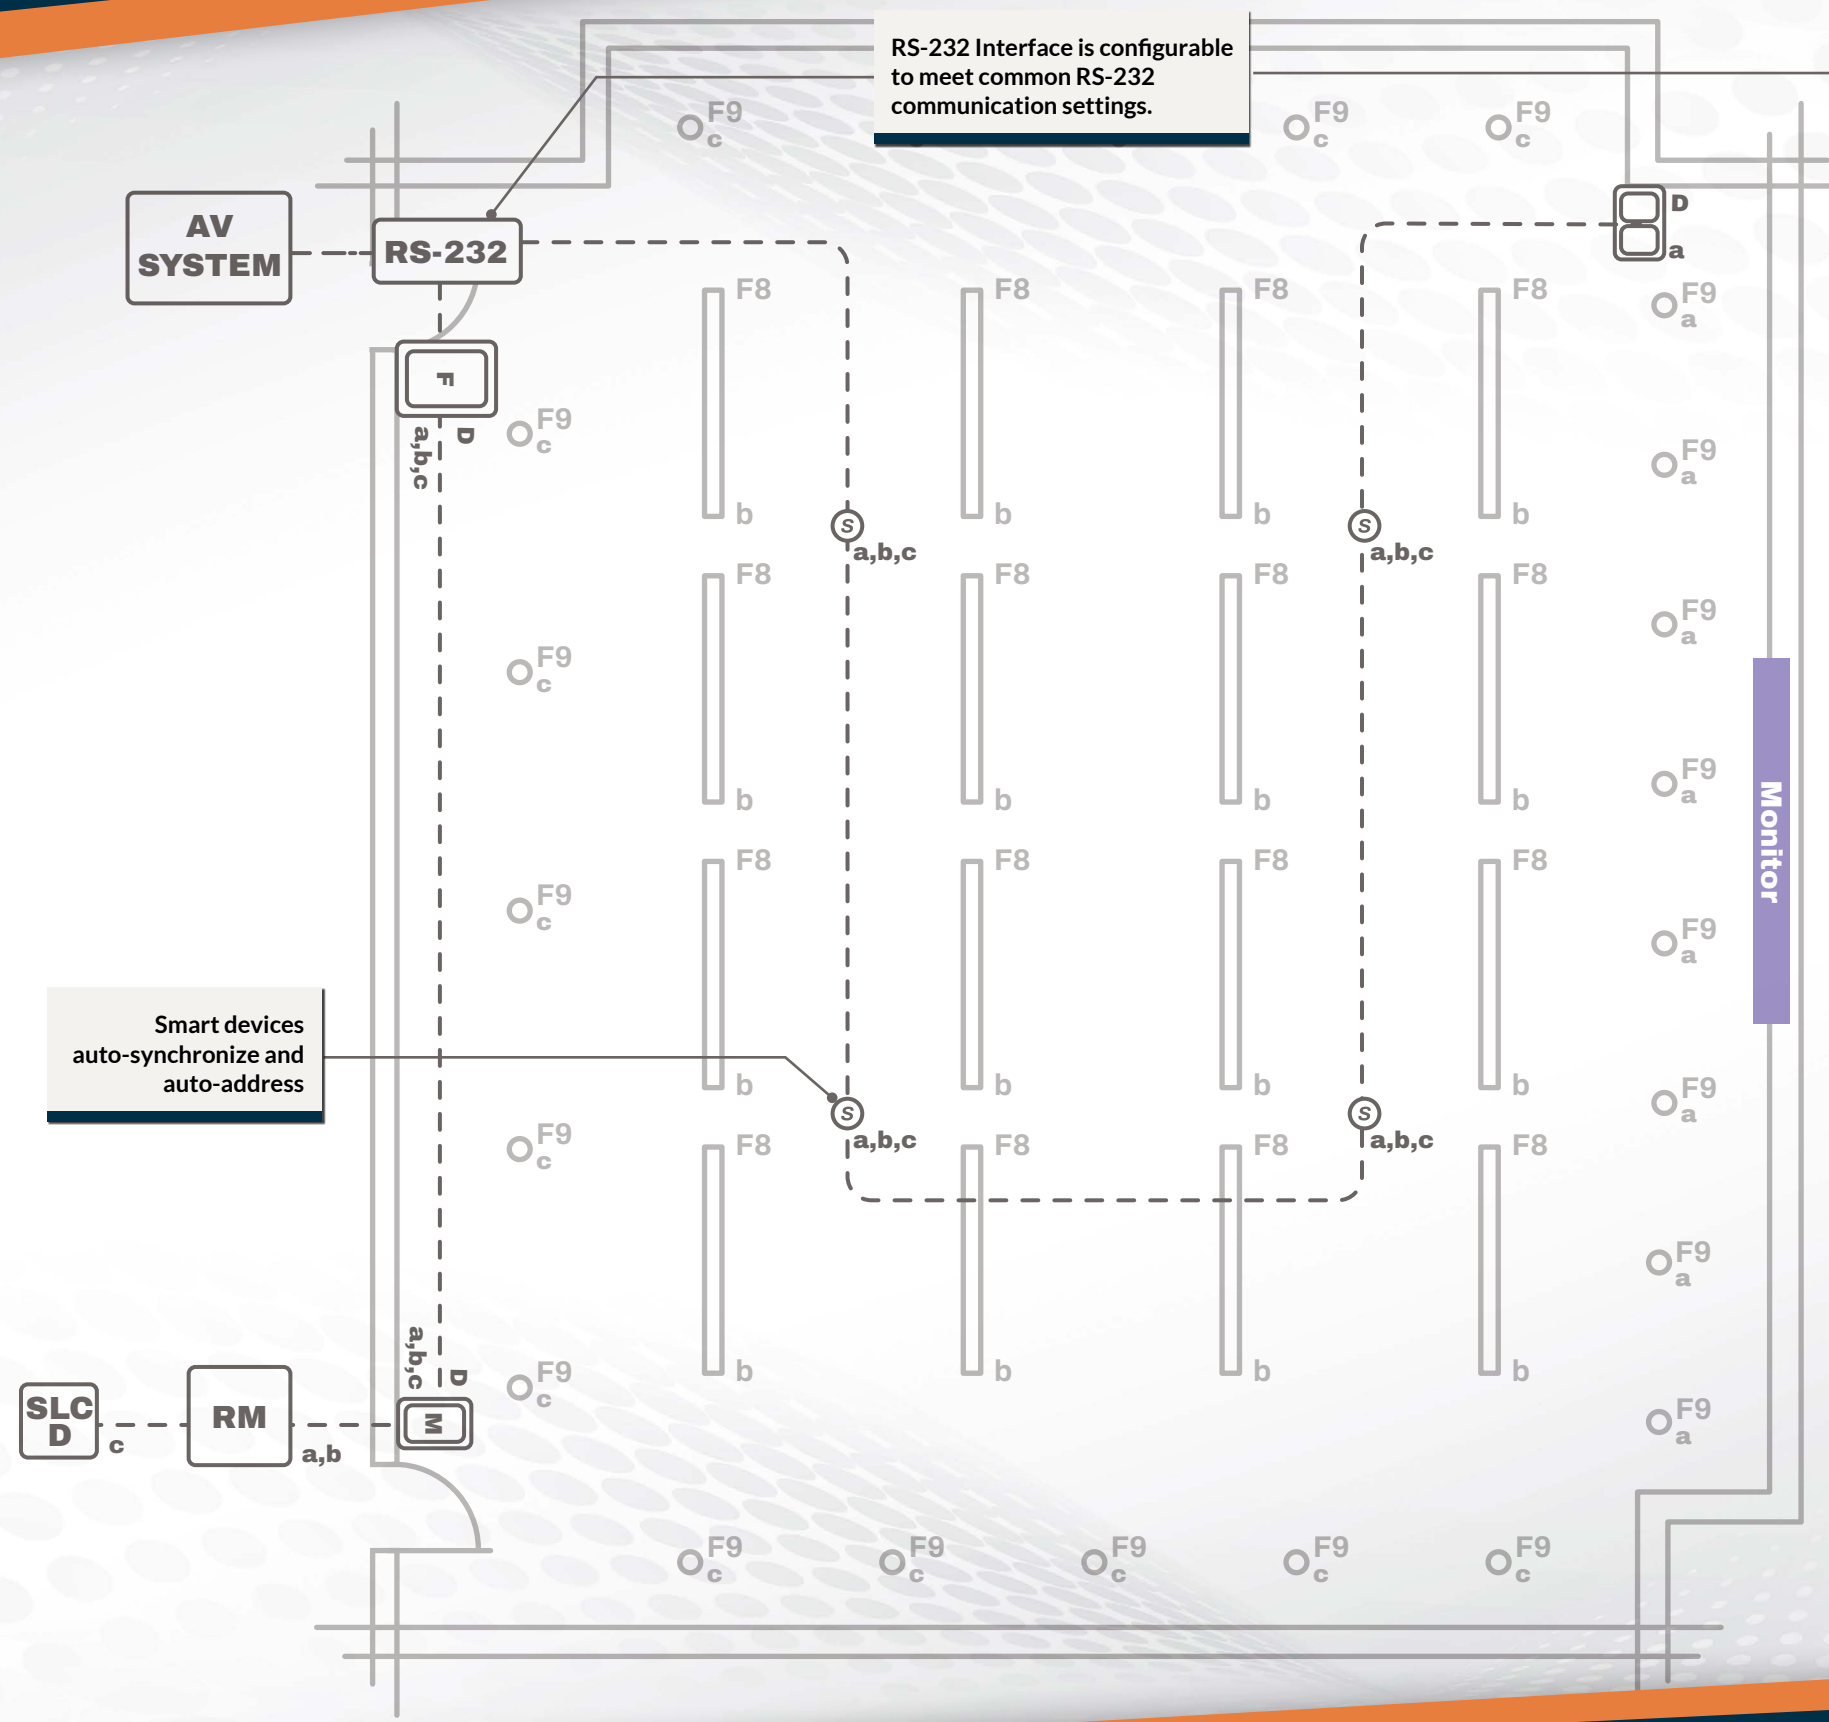

Smart devices auto-synchronize and auto-address