




**RELAY/DIMMER PANEL**

**PART #: RD32-S2**

**RD PANEL WITH COVERS INSTALLED**

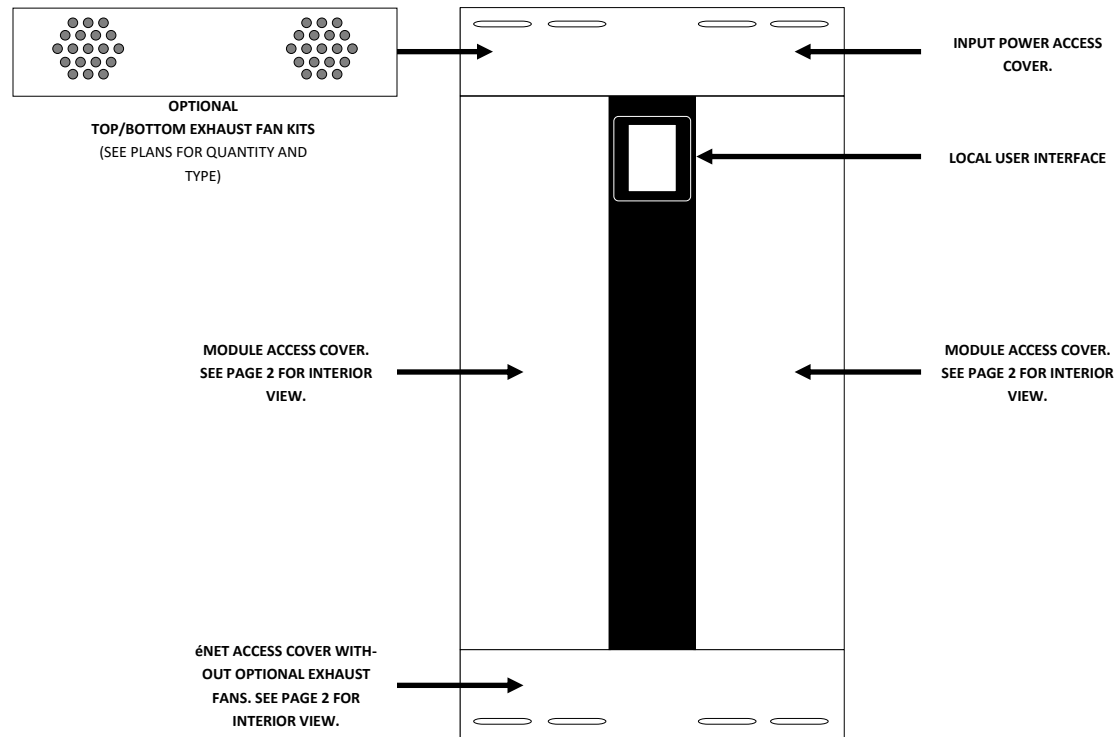

IF EXHAUST FANS ARE REQUIRED  
THEY WILL BE INSTALLED BY TOUCHÉ  
PRIOR TO SHIPPING.





**RELAY/DIMMER PANEL**

**PART #: RD32-S2**

**TOP OF RD PANEL WITH COVERS REMOVED**


**BOTTOM OF RD PANEL WITH COVERS REMOVED**

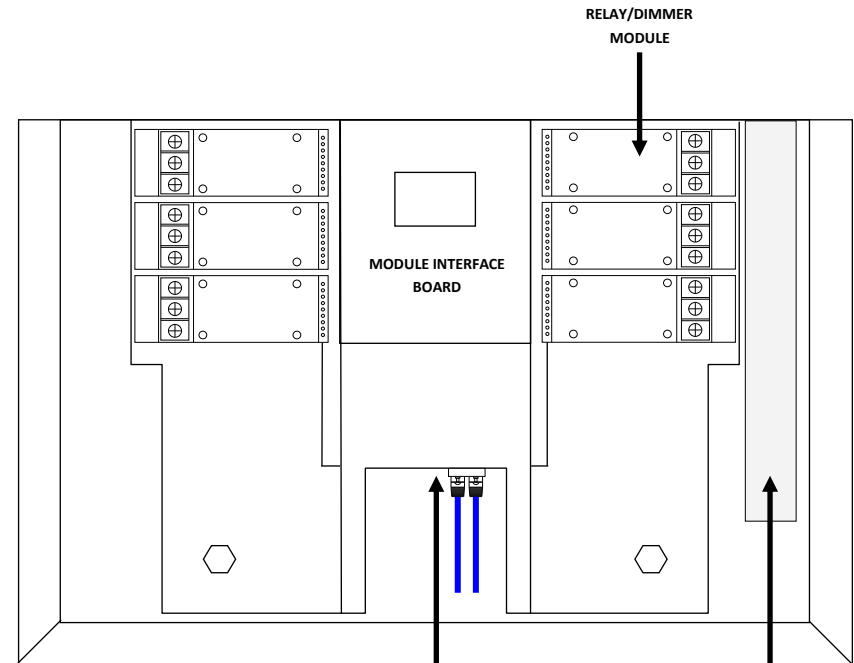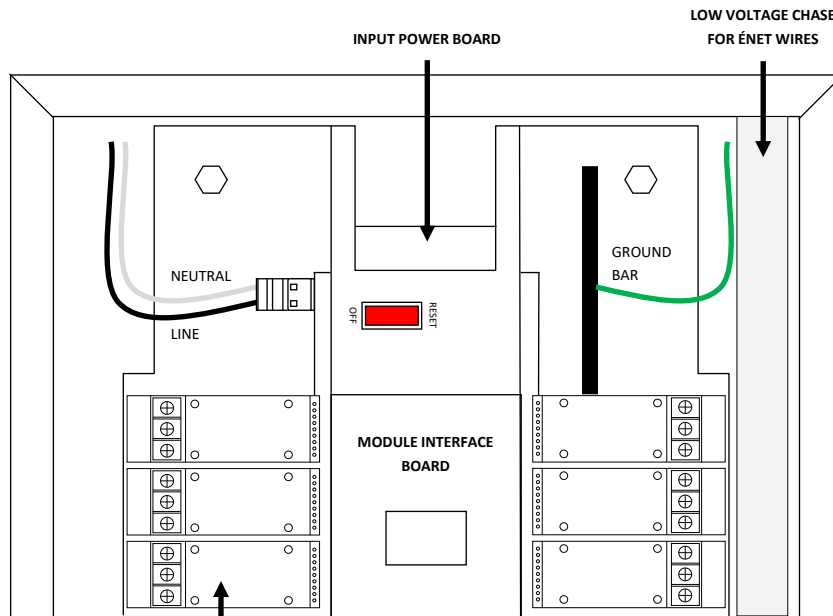

RELAY/DIMMER MODULE  
SEE PAGE 3 FOR DIMMER  
WIRING.

COMMUNICATION BOARD  
LOCATION

LOW VOLTAGE CHASE  
FOR ÉNET WIRES


CABLE TYPES			
LINE ID	DESCRIPTION	TYPE	NOTES
	ETHERNET	CAT 5 (MIN)	MAXIMUM SEGMENT LENGTH IS 100 METERS (300')




**RELAY/DIMMER PANEL LOAD CONTROL MODULE WIRING**

**PART #: RD32-S2**


**LEFT SIDE MODULE INSTALLATION**

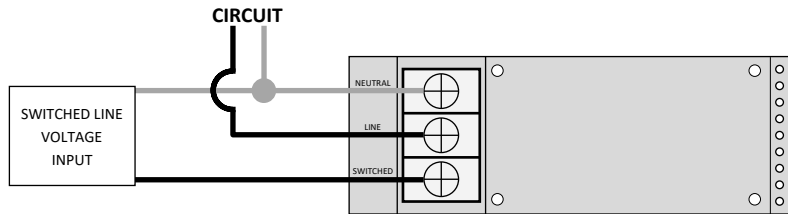


RL-1P-120/347-S2

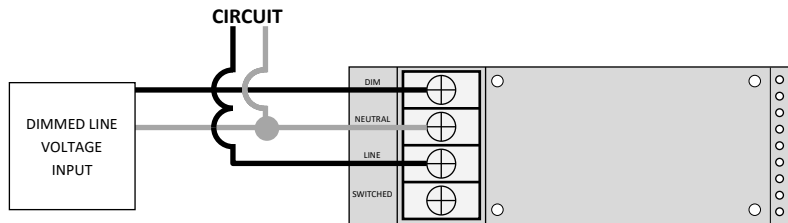

DIM1-2W/3W-120/277  
& DIM1M-2W/3W-120  
(2 WIRE)

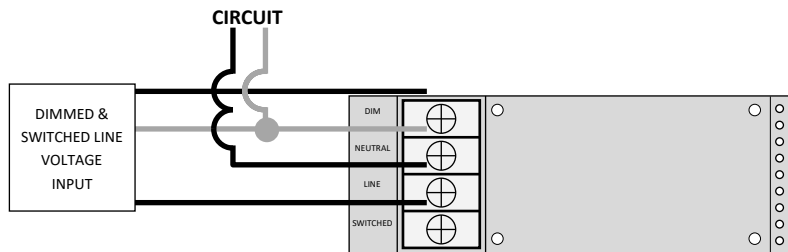





DIM1-2W/3W-120/277  
& DIM1M-2W/3W-120  
(3 WIRE)

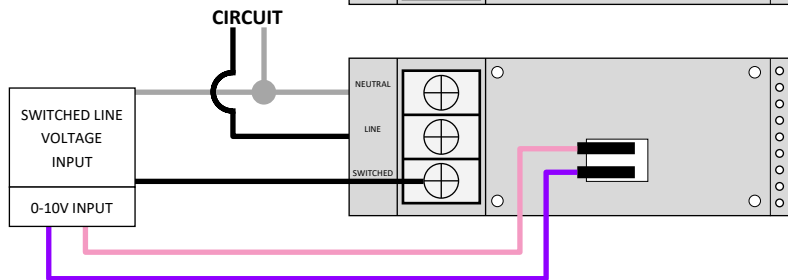

DIM-0/10V

0-10V WIRES TO BE RATED AT 600V OR LUMINAIRE CABLE USED.

**RIGHT SIDE MODULE INSTALLATION**

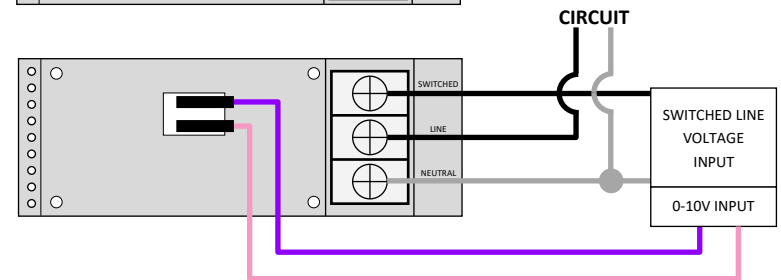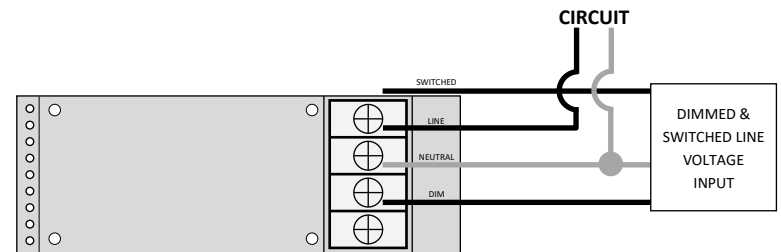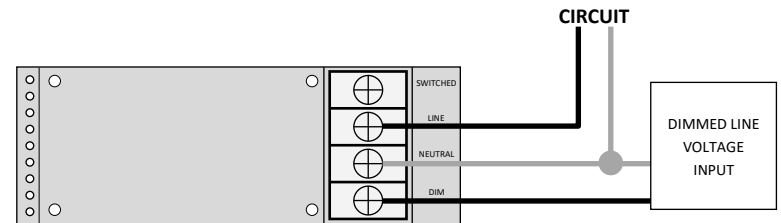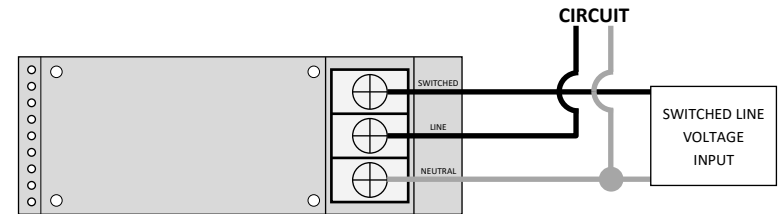

0-10V WIRES TO BE RATED AT 600V OR LUMINAIRE CABLE USED.



**NETWORK CONNECTIVITY DIAGRAM**

**PART #: RD32-S2**

